



27th September 2024

500ADAT Firmware v1.40 Update Process

Mac

Please note: There are separate firmware updater applications for Intel and Arm processors.

The firmware updater application works on Mac OS 13 & 14.

1. When the "Apple cannot check it for malicious software" pops up, click ok.
2. On Mac OS, go to "System & Settings" then "Privacy & Security" scroll down to "Security" it will say "Cranborne Firmware Updater was blocked from use because it is not from an identified developer", click "Open Anyway"
3. Follow the "500ADAT Firmware Updater Application" instructions below.

Windows

The firmware updater application works on Windows 10 & 11.


1. Uninstall the "Cranborne_Audio_FirmwareUpdate_Driver v5.50".
2. Run the "Cranborne Audio 500ADAT Firmware Update Driver Setup".
3. When "Windows protected your PC" pops up click "More info" then "Run anyway"
4. Follow the "500ADAT Firmware Updater Application" instructions below.
5. Restart the PC.

500ADAT Firmware Updater Application


The following instructions are the same for both Mac and Windows.

First, connect your 500ADAT to your PC/MAC.


Run the "Cranborne Audio 500ADAT Firmware Updater_v1.40", it should look like the following:

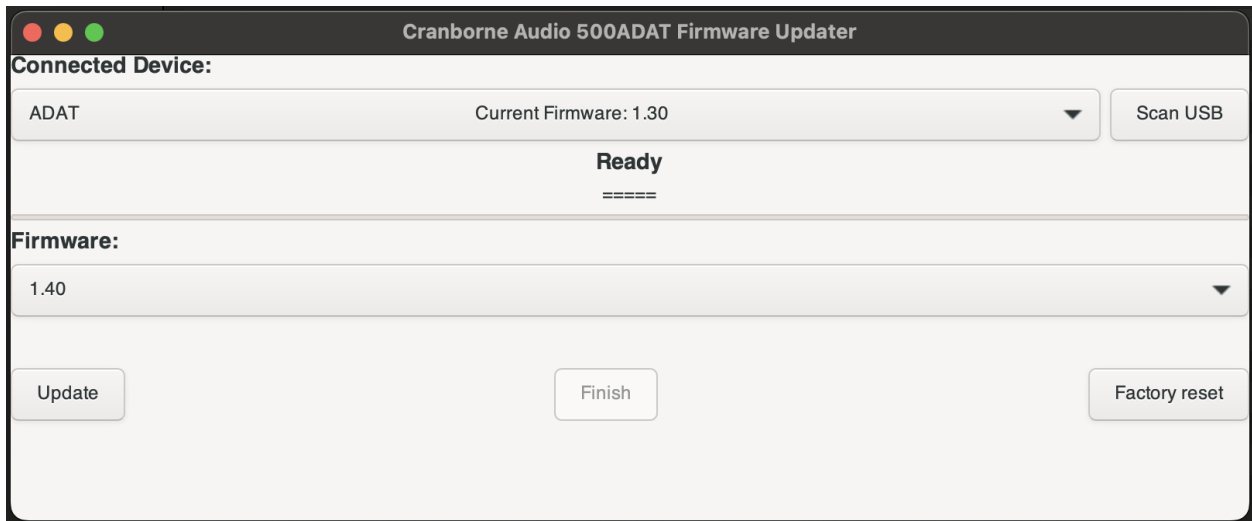


Ensure the Firmware menu says 1.40

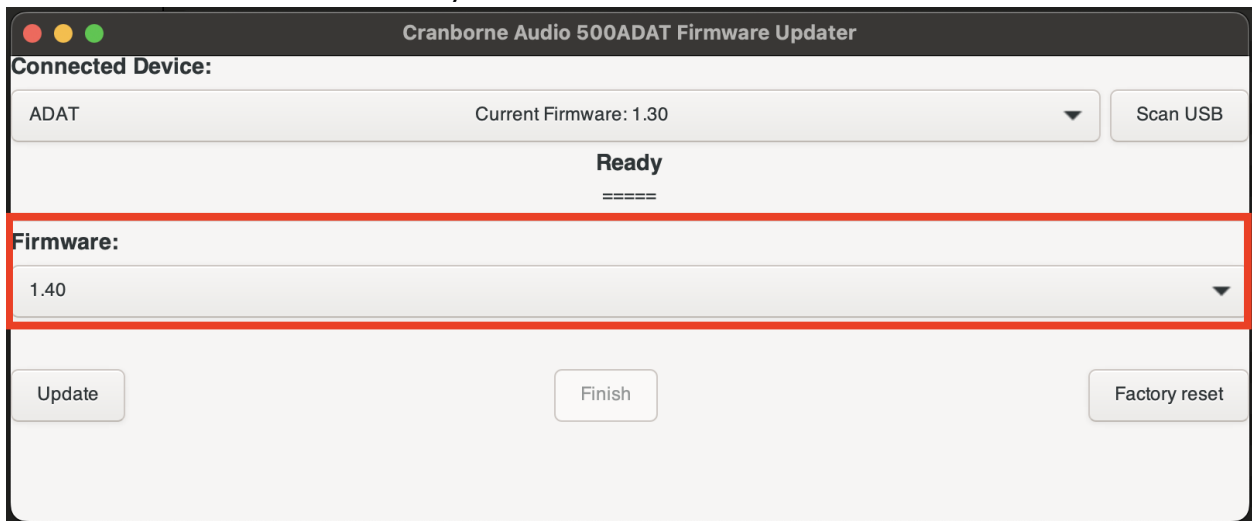

Click "Update"

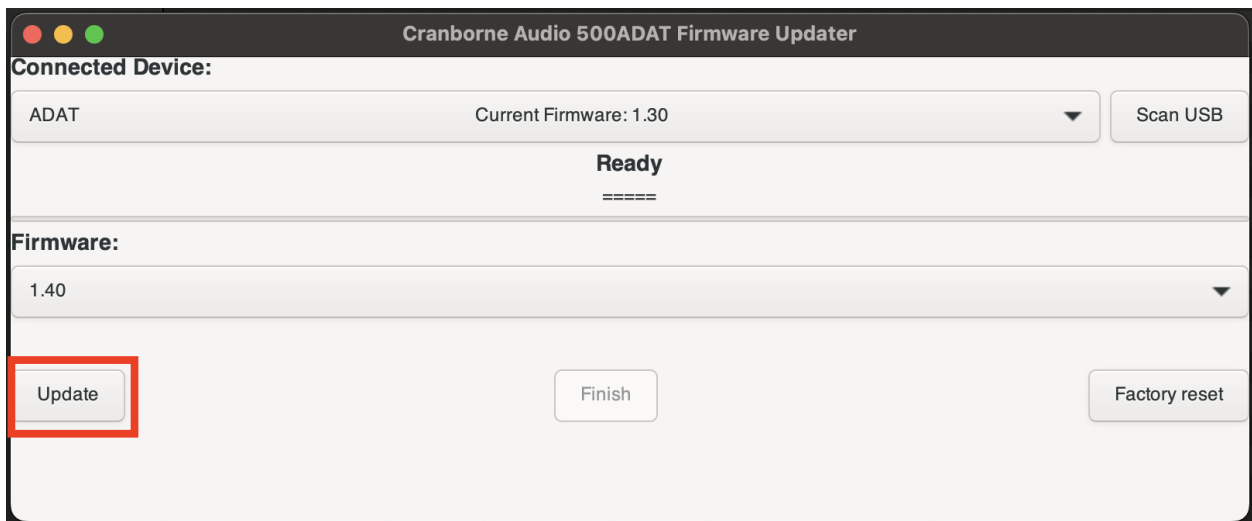

Wait until the firmware update has finished, it will look like the image below, note "Current Firmware: 1.40" is now displayed in the Connected Device menu.

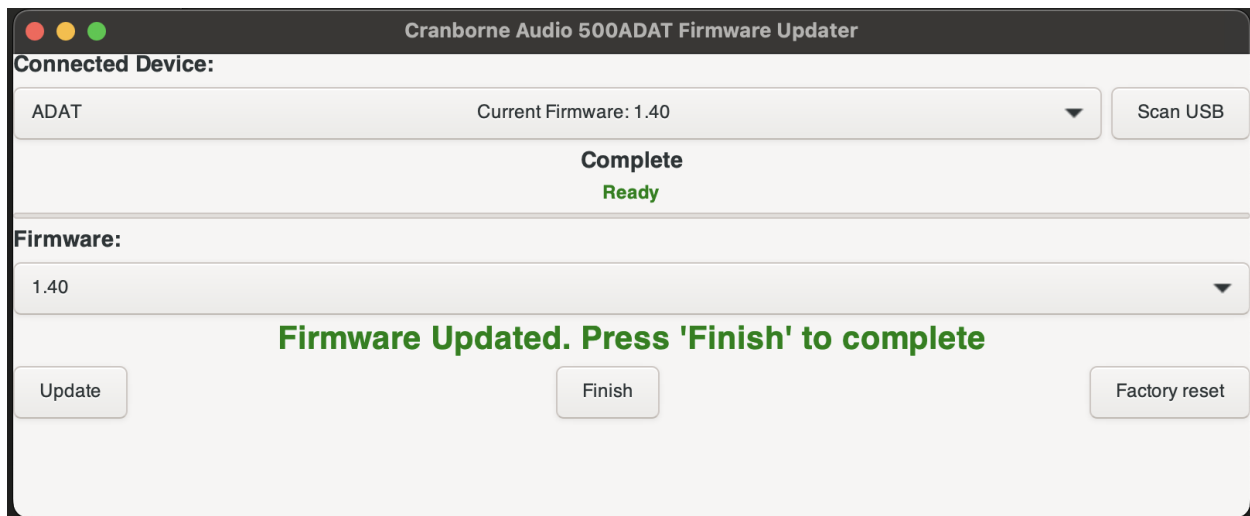

Click Finish to quit the application.